




## MRF

### restyling end feed

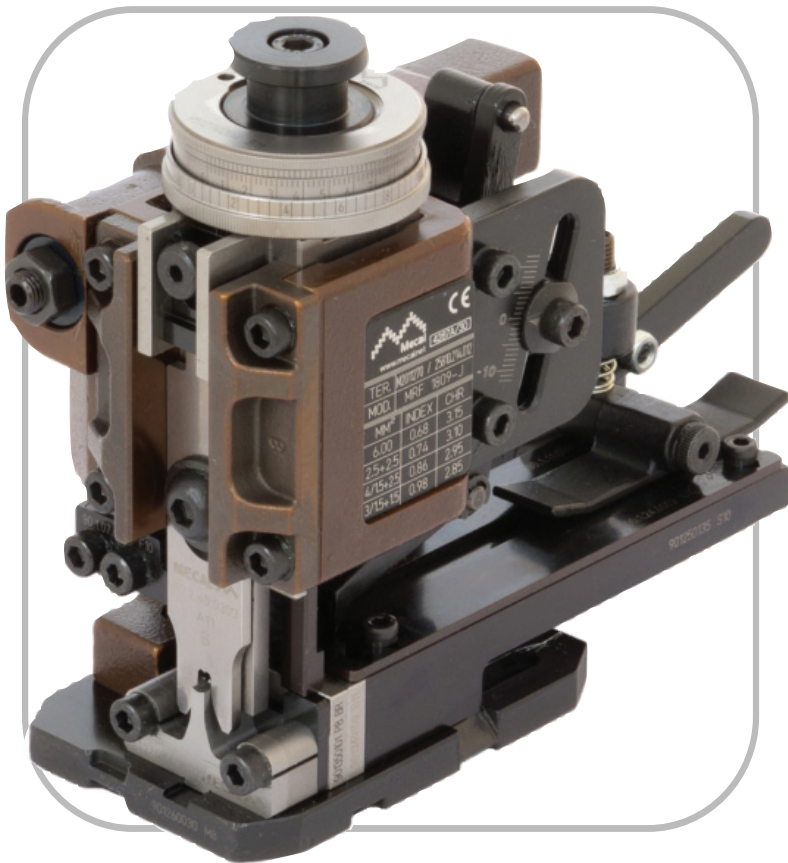

- For terminals linked « end to end », rolled over a reel, with thickness < 1.2mm, terminal pitch < 27mm, wire section between 0 and 10mm<sup>2</sup>.
- Mechanical end-feed feeding system. Can be supplied either with a continuous or a four-pad regulating head.
- Non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.
- Fitted to any crimping press having a crimping height of 135.8mm ± 0.02mm
- Can be used in both manual and automatic configuration.
- Easy replacement of crimpers and anvils.

#### DESCRIPTION:

Restyling end feed mini applicator

#### CRIMPING HEIGHT:

(5.346") 135.8mm

#### STROKE:

(1.575/1.18") 40/30mm

#### TERMINAL PITCH:

(<1.06") < 27 mm

#### TERMINAL THICKNESS:

(<0.047") < 1.2mm

#### WIRE SECTION:

max 10mm<sup>2</sup>

#### FEEDING SYSTEM:

Mechanical

#### WEIGHT:

(8.8 lb) 4.0 Kg

#### DIMENSION (mm):

W 72 x H 145.5 x D 196.5

#### DIMENSION ("):

W 2.83" x H 5.72" x D 7.73"

#### OPTION:

Continuous regulating head.  
(0.00039") 0.01mm resolution.  
(0.106") 2.7mm range