Mecal BY STARN

www.mecalbystarn.com

MRSP

restyling pneumatic left side feed

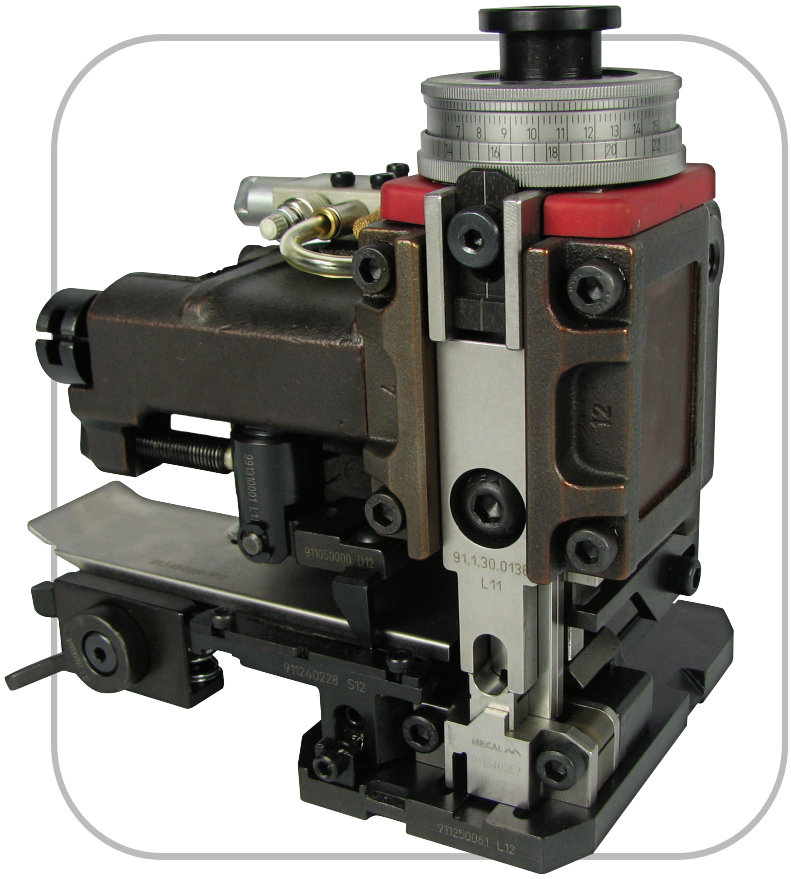

DESCRIPTION:
Restyling pneumatic left side feed mini applicator

CRIMPING HEIGHT:
(5.346") 135.8mm

STROKE:
(1.575/1.18") 40/30mm

TERMINAL PITCH:
(>1.06") > 27mm
Max. stroke 35mm

TERMINAL THICKNESS:
(<0.047") < 1.2mm

WIRE SECTION:
max 10mm2

FEEDING SYSTEM:
air pressure 5/6 Bar - continous air (6mm air line)

WEIGHT:
(9.02 lb) 4.1 Kg

DIMENSION (MM):
W 140.5 x H 145.5 x D 105

DIMENSION (”):
W 5.53" x H 5.72" x D 4.13"

OPTION:
Continuous regulating head.
(0.00039") 0.01mm resolution.
(0.106") 2.7mm range

- For linked terminals, with thickness < 1.2mm., terminal pitch > 27mm.
- Pneumatic feeding-system.
- Wire section between 0 and 10mm².
- Feeding system for linked terminals on a reel to be unrolled left to right.
- Can be supplied either with a continuous or a four-pad regulating head.
- Non-resettable 7-digit cycle counter.
- Can be fitted to any crimping press having a crimping height of 135.8mm ± 0.02mm.
- Can be used in both manual and automatic configuration.
- Easy replacement of crimpers and anvils.

20524 Blooming Valley Road, Meadville, PA 16335 | 814-724-1057 | Fax: 814-333-8531